

AXOR®

ARTE INTERIOR



CONCEALED HINGES


FOR INTERIOR DOORS



axorindustry.com

CONCEALED INTERIOR DOOR HINGES 24/24×120

Concealed interior door hinges ARTE Interior 24/24×120 for timber and MDF doors, with the possibility of adjustment. Maximum door weight for a set of two hinges up to 60 kg. Quantity in the package: 2 pcs.

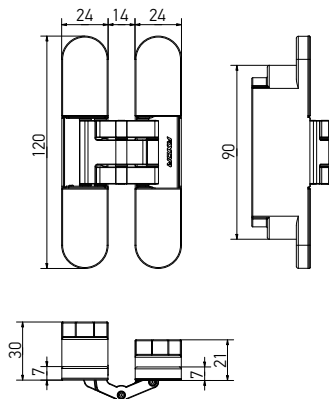

D5005-00-N01

White RAL 9016,
zinc coated



D5005-00-N03

Chrome matte,
zinc coated



D5005-00-N02

Brown
zinc coated



D5005-00-N07

Matte black RAL 9005,
zinc coated



D5005-00-N09

Anthracite gray
RAL7016
zinc coated



COLOR RANGE*

* Hinges in non-standard colors are available to order within 14 days.

CONCEALED INTERIOR DOOR HINGES 24/24×120



D5004-00-N01

White
RAL 9016



D5004-00-N05

Gold



D5004-00-N02

Brown



D5004-00-N06

Bronze



D5004-00-N03

Chrome matte




D5004-00-N07

Matte black RAL 9005

CONCEALED INTERIOR DOOR HINGES 30/24×120

Concealed interior door hinges ARTE Interior 30/24×120 for timber and MDF doors, with the possibility of adjustment. Maximum door weight for a set of two hinges up to 60 kg. Quantity in the package: 2 pcs.

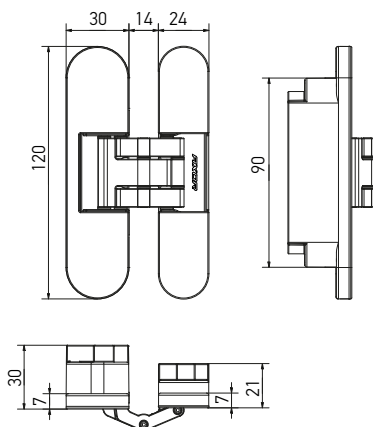

D5015-00-N01

White RAL 9016,
zinc coated



D5015-00-N03

Chrome matte,
zinc coated



D5015-00-N02

Brown
zinc coated



D5015-00-N07

Matte black RAL 9005,
zinc coated



D5015-00-N09

Anthracite gray
RAL7016
zinc coated



* Hinges in non-standard colors are available to order within 14 days.

CONCEALED INTERIOR DOOR HINGES 30/24×120



D5014-00-N01

White
RAL 9016




D5014-00-N05

Gold



D5014-00-N02

Brown



D5014-00-N06

Bronze



D5014-00-N03

Chrome matte



D5014-00-N07

Matte black RAL 9005



D5014-00-N09

Anthracite gray
RAL7016




COLOR RANGE*

* Hinges in non-standard colors are available to order within 14 days.

CONCEALED INTERIOR DOOR HINGES 30/30×125

Concealed interior door hinges ARTE Interior 30/30×125 for timber and MDF doors, with the possibility of adjustment. Maximum door weight for a set of two hinges up to 60 kg. Quantity in the package: 2 pcs.

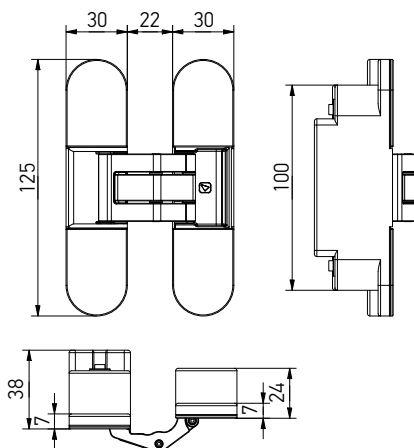

D5021-00-N01

White RAL 9016,
zinc coated



D5021-00-N03

Chrome matte,
zinc coated



D5021-00-N02

Brown
zinc coated



D5021-00-N07

Matte black RAL 9005,
zinc coated



D5021-00-N09

Anthracite gray
RAL7016
zinc coated

COLOR RANGE*

* Hinges in non-standard colors are available to order within 14 days.

CONCEALED INTERIOR DOOR HINGES 30/30×125



D5020-00-N01

White
RAL 9016



D5020-00-N05

Gold



D5020-00-N02

Brown



D5020-00-N06

Bronze



D5020-00-N03

Chrome matte



D5020-00-N07

Matte black RAL 9005






D5020-00-N09

Matt
anthracite gray
RAL7016




COLOR RANGE*

* Hinges in non-standard colors are available to order within 14 days.

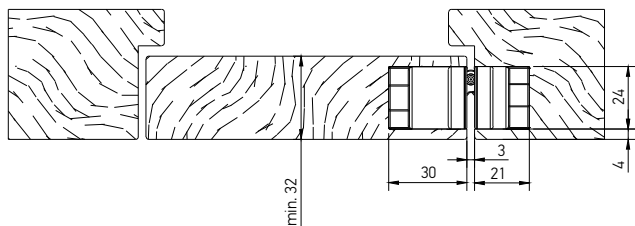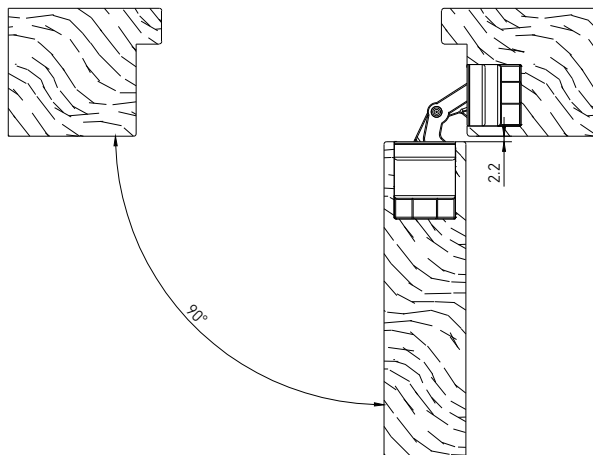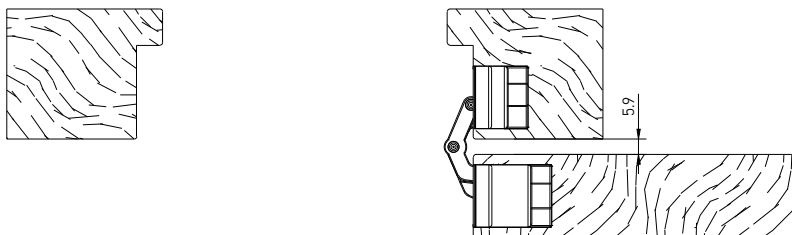
INSTALLATION OF CONCEALED HINGES (24/24×120)**CLOSED****OPENED 90°****OPENED 180°**

INSTALLATION OF CONCEALED HINGES (30/24×120)


CLOSED

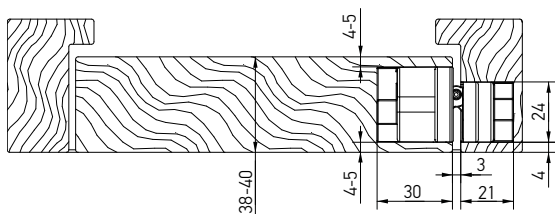

OPENED 90°

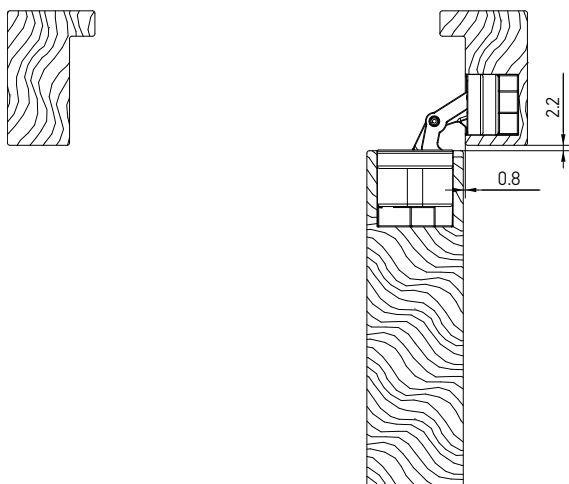


OPENED 180°

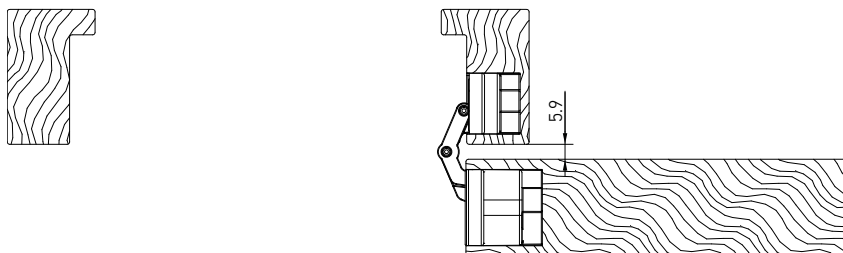

INSTALLATION OF CONCEALED HINGES (30/30×125)

Central position


CLOSED

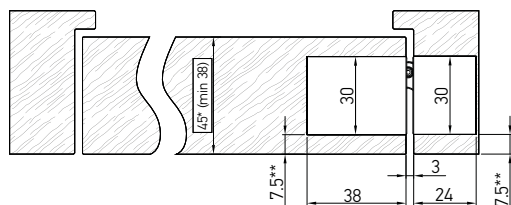


* central positioning of hinge up to 45 mm door leaf

** in depend of door leaf thickness

OPENED 90°

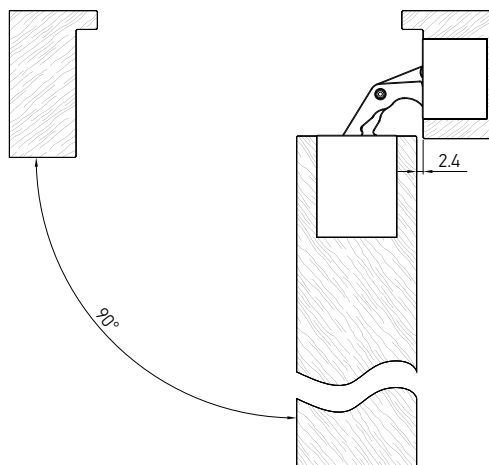


OPENED 180°

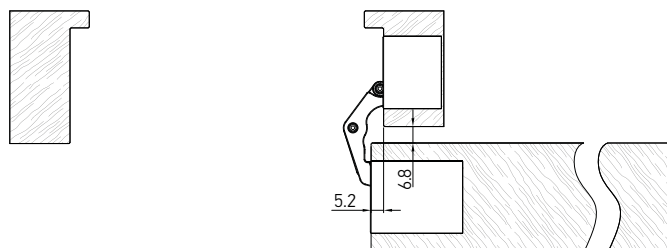


INSTALLATION OF CONCEALED HINGES (30/30×125) Position with displacement (with molding)


CLOSED

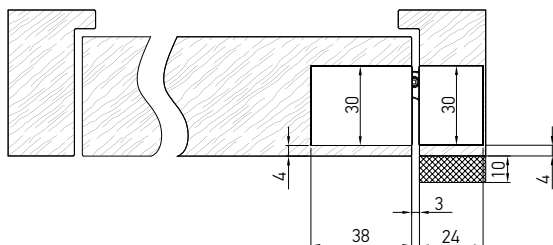


OPENED 90°

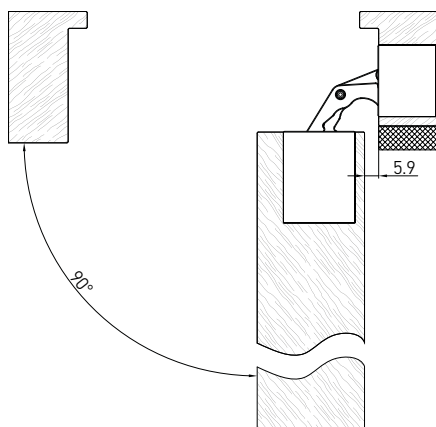

OPENED 180°

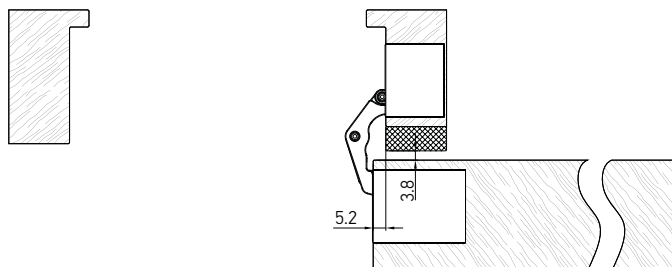


DIMENSIONS FOR MILLING (24/24×120)

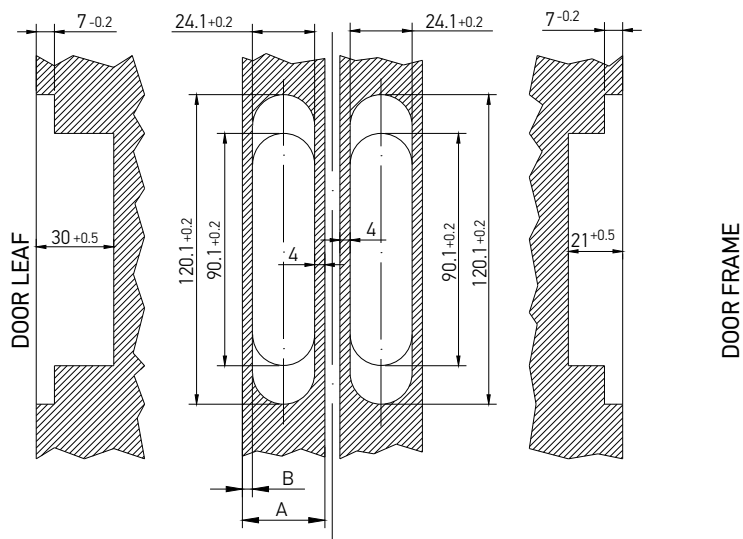


A, mm	B, mm
32	4
33	5
34	6
35	7
36	8
37	9
38	10
39	11
40	12
41	13
42	14

DIMENSIONS FOR MILLING (30/24×120)

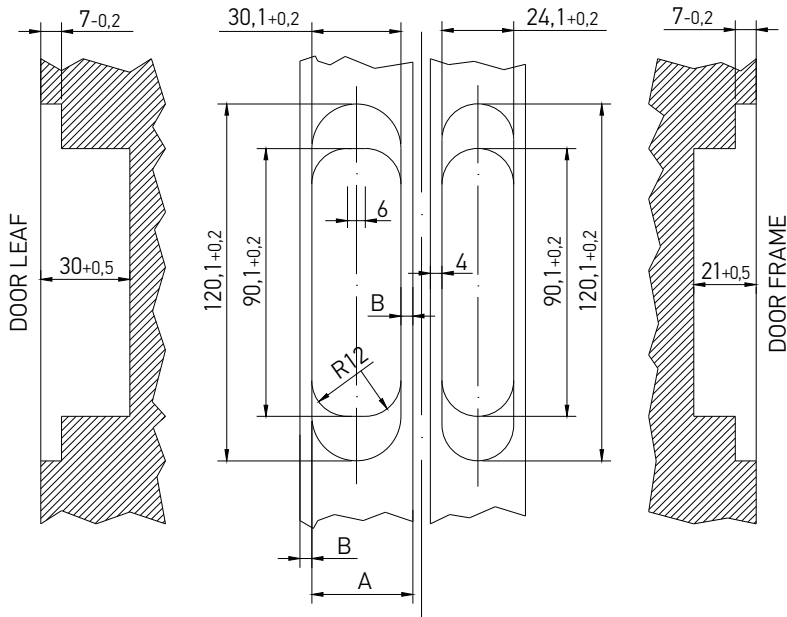


A, mm	B, mm
38	4
40	5

DIMENSIONS FOR MILLING (30/30×125)

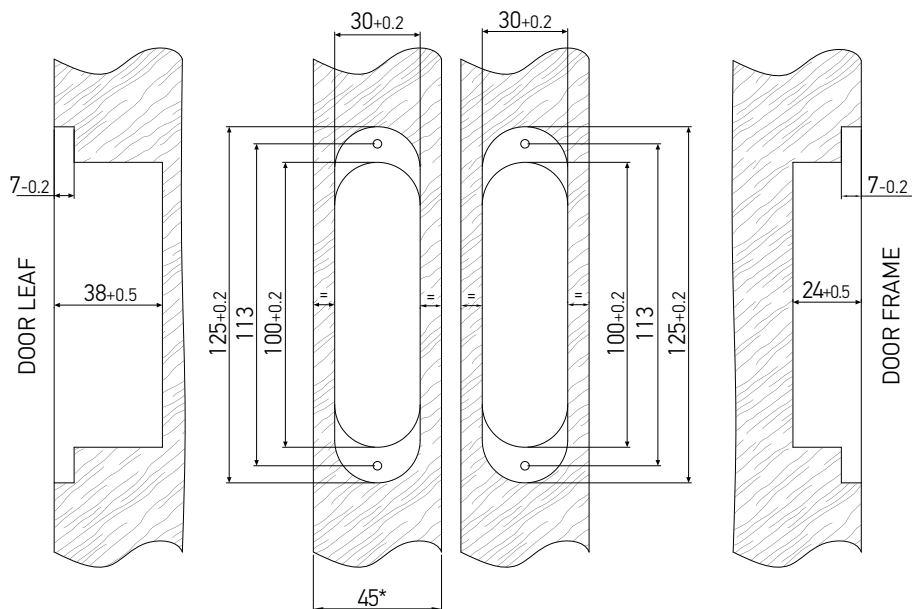

* central positioning of hinge from 38 mm up to 45 mm door leaf

INSTALLATION SCHEME

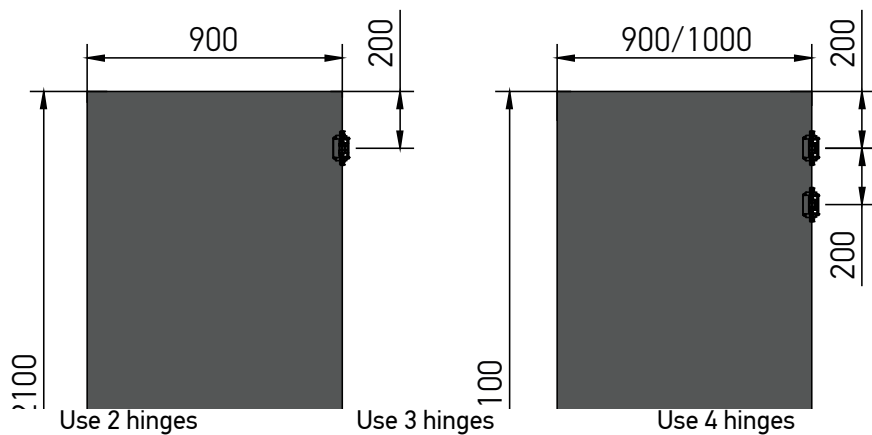


Required number of hinges*, pcs

Door height, mm	>2100	4	4	4	4	4
	2100	2	2	2	2	3
	2000	2	2	2	2	3
	1900	2	2	2	2	3
	1800	2	2	2	2	3
		600	700	800	900	1000
		Door width, mm				

* Door weight up to 60 kg

MILLING PROCEDURE (24/24×120)

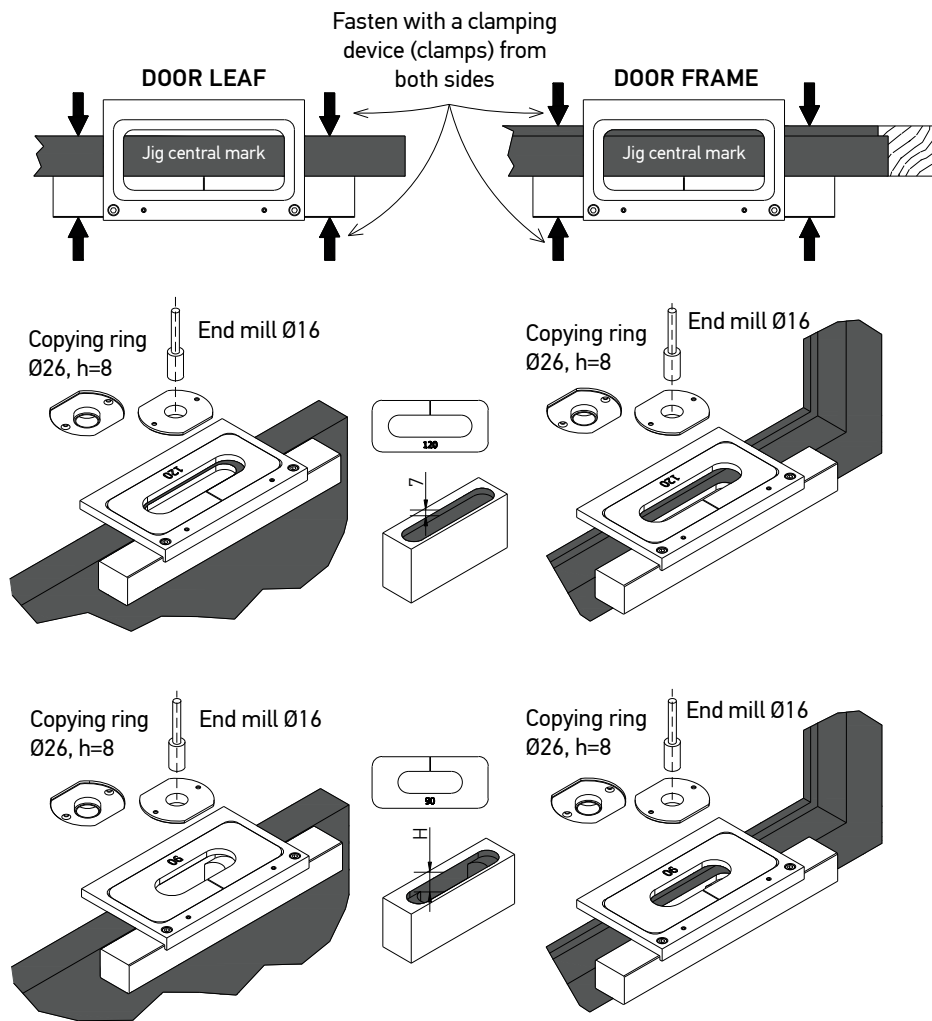

H, mm	
Door leaf	Door frame
30	21


A7226-99-N07

Basic milling jig, 24 mm (PA)

A7*-**-N03**

Set of copying plates

MILLING PROCEDURE (30/24×120)

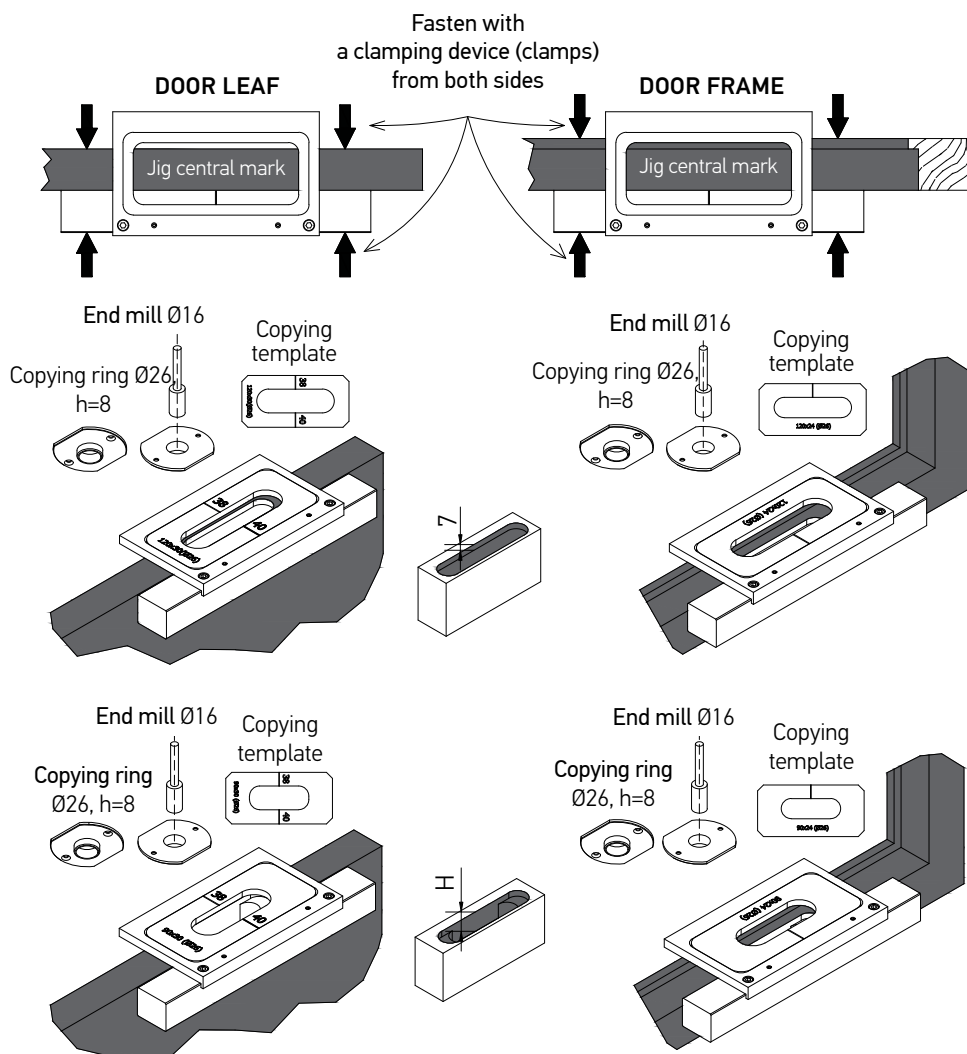

H, mm	
Door leaf	Door frame
30	21


A7226-99-N07

Basic milling jig, 24 mm (PA)

A7***-**-N03

Set of copying plates

MILLING PROCEDURE (30/30×125)

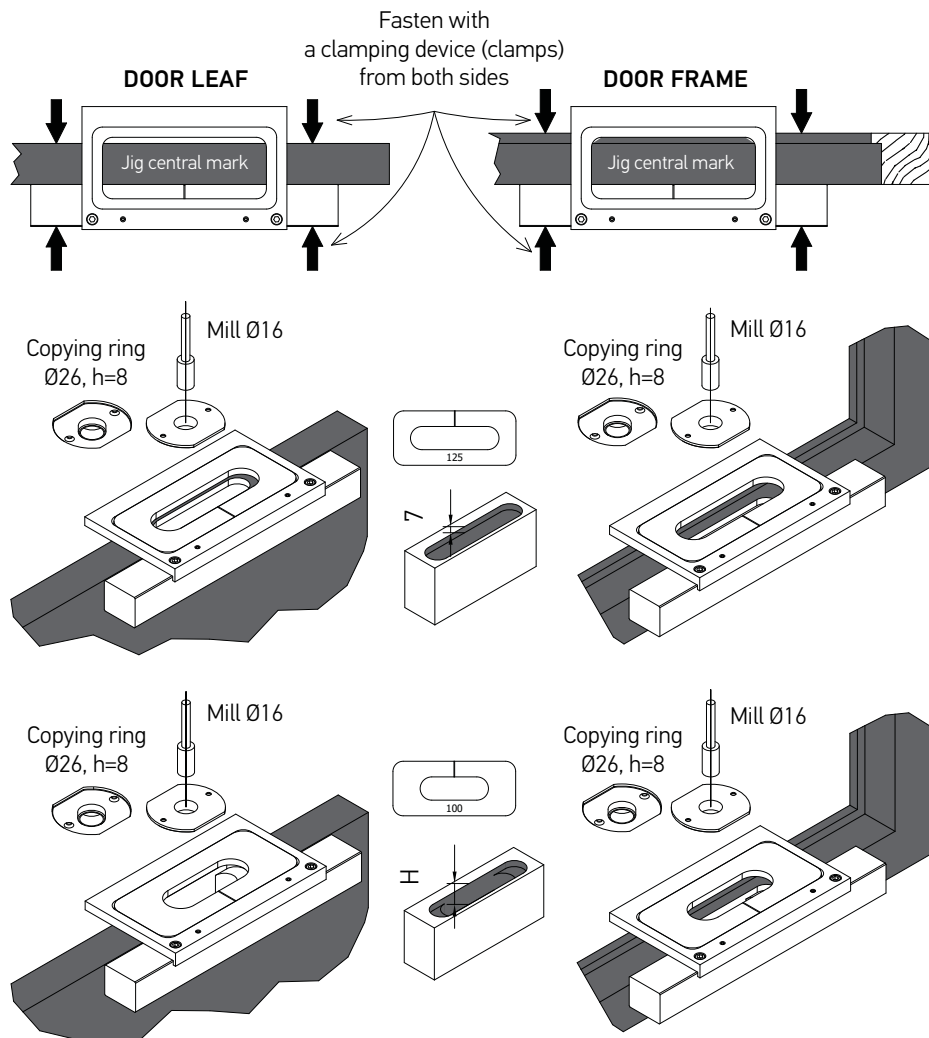

H, mm	
Door leaf	Door frame
38	24


A7226-99-N07

Basic milling jig, 24 mm (PA)


A7***-**-N03

Set of copying plates

INSTALLATION PROCEDURE (24/24×120; 30/24×120)

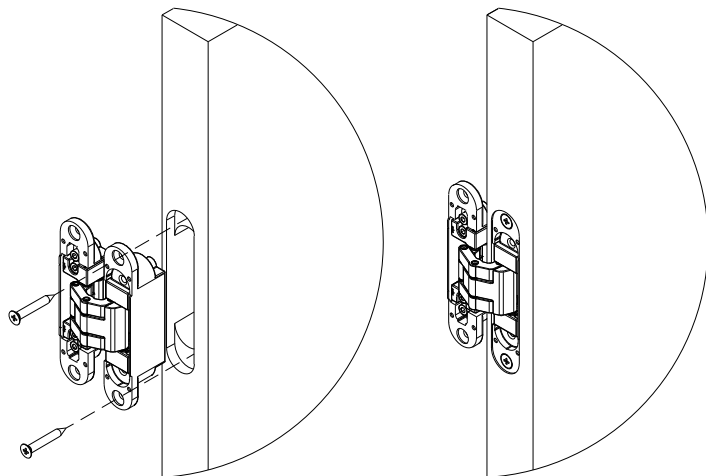


1. Install the hinges into the proper grooves on the door leaf, paying attention to the direction of opening (depth 30 mm).
2. Fix with screws Ø5 x min. 35.

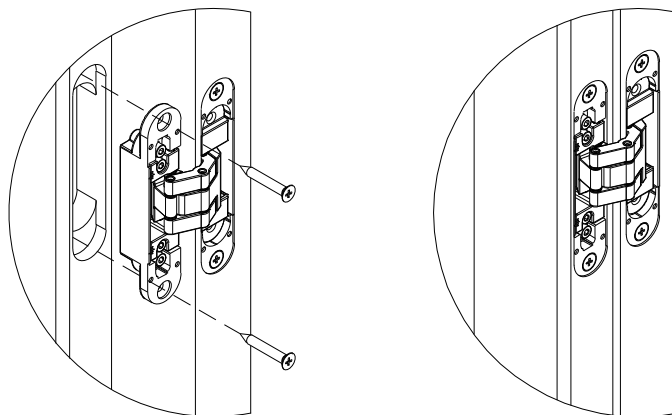


3. Install the door leaf on the door frame, inserting the hinges into the proper grooves (21 mm deep).
4. Fix with screws Ø5 x min. 25.

INSTALLATION PROCEDURE (30/30×125)

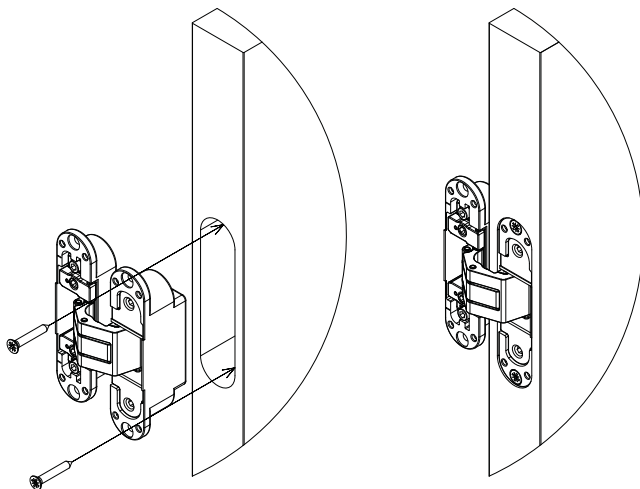


1. Install the hinges into the proper grooves on the door leaf, paying attention to the direction of opening (depth 38 mm).
2. Fix with screws Ø5 x min. 35.

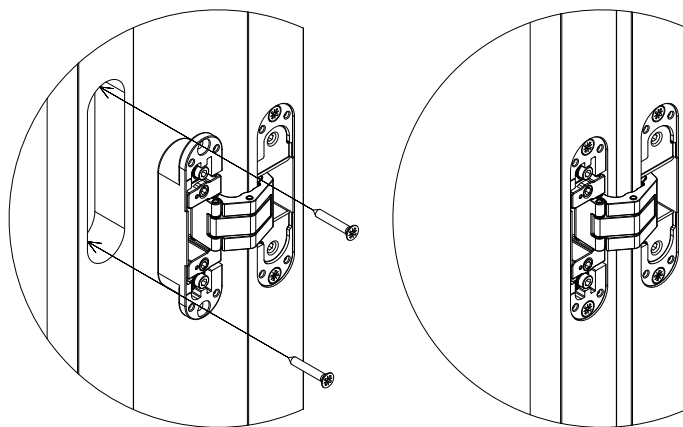


3. Install the door leaf on the door frame, inserting the hinges into the proper grooves (24 mm deep).
4. Fix with screws Ø5 x min. 25


MOUNTING PLATE D9001-24-N03

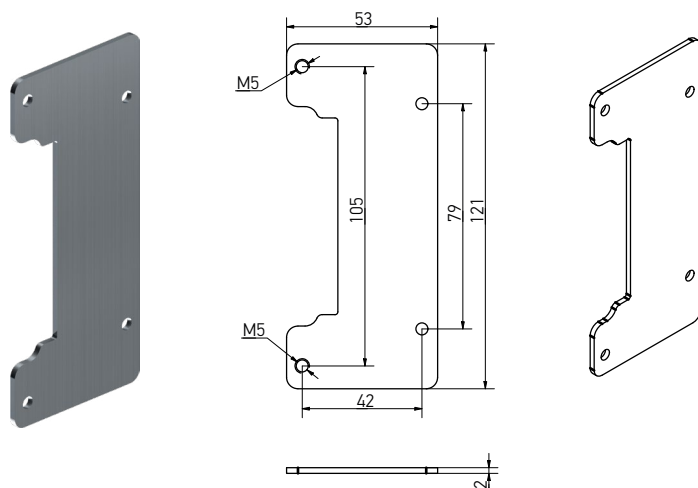

INSTALLATION OF DECORATIVE COVERS

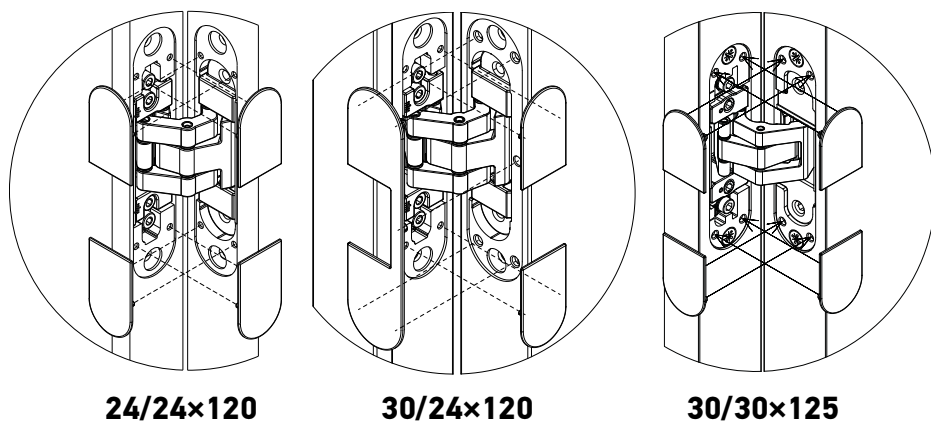


VERTICAL ADJUSTMENT (24/24×120; 30/24×120)

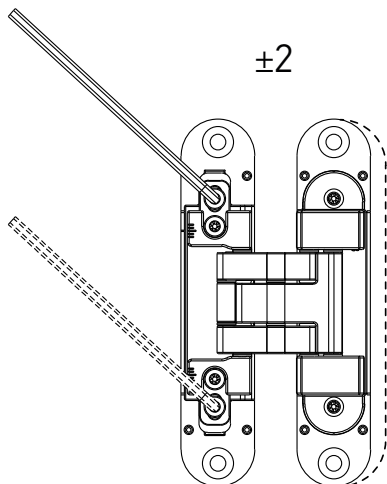

Within ± 2 mm.

Vertical adjustment is carried out on the part of the hinge installed in the door frame. To make the adjustment, it is necessary to loosen the two specified screws with a 3 mm hex key and lift up the door leaf to the required position. Using of a flat screwdriver is permitted, which can be inserted into the groove between the body and the adjustable part of the hinge and used as an additional lever. Holding the door leaf in the required position, tighten the fastening screws.


HORIZONTAL ADJUSTMENT (24/24×120; 30/24×120)

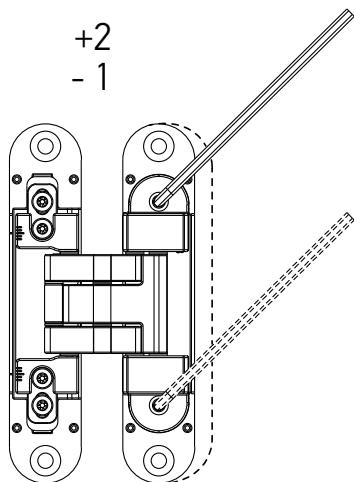

Within $+2$ mm (toward the hinges) / -1 mm.

Horizontal adjustment is carried out on the part of the hinge installed in the door leaf. To make the adjustment, it is necessary to screw in or unscrew the two specified screws, using a 3 mm hex key, thereby setting the door leaf in the required position. It is not permitted to screw in or unscrew only one screw immediately to the extreme position, only sequential screwing.



DEPTH ADJUSTMENT (24/24×120; 30/24×120)

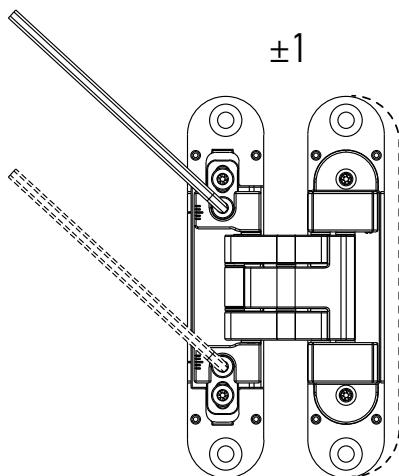

Within ± 1 mm.

Depth adjustment is carried out on the part of the hinge installed in the door frame. To make the adjustment, it is necessary to loosen the two specified screws, using a 3 mm hex key, and then install the door leaf in the required position. After adjustment, tighten the fastening screws.

VERTICAL ADJUSTMENT (30/30×125)

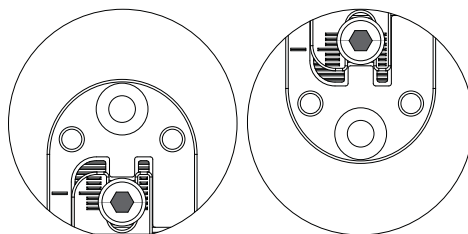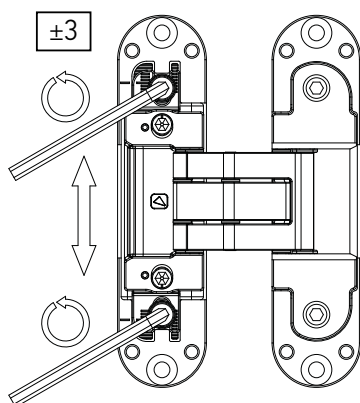


 HEX 4

Within ± 3 mm.

Vertical adjustment is carried out on the part of the hinge installed in the door frame. To make the adjustment, it is necessary to loosen the two specified screws with a 4 mm hex key and lift up the door leaf to the required position. Holding the door leaf in the required position, tighten the fastening screws.


HORIZONTAL ADJUSTMENT (30/30×125)

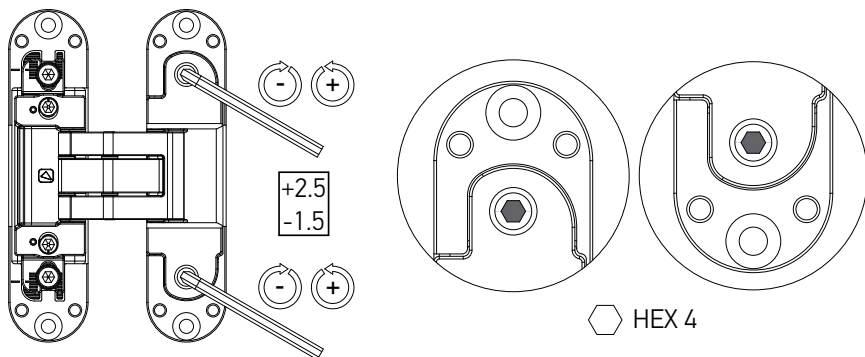

Within +2.5 mm (toward the hinges) / -1.5 mm.

Horizontal adjustment is carried out on the part of the hinge installed in the door leaf. To make the adjustment, it is necessary to screw in or unscrew the two specified screws, using a 4 mm hex key, thereby setting the door leaf in the required position. It is not permitted to screw in or unscrew only one screw immediately to the extreme position, only sequential screwing.

DEPTH ADJUSTMENT (30/30×125)

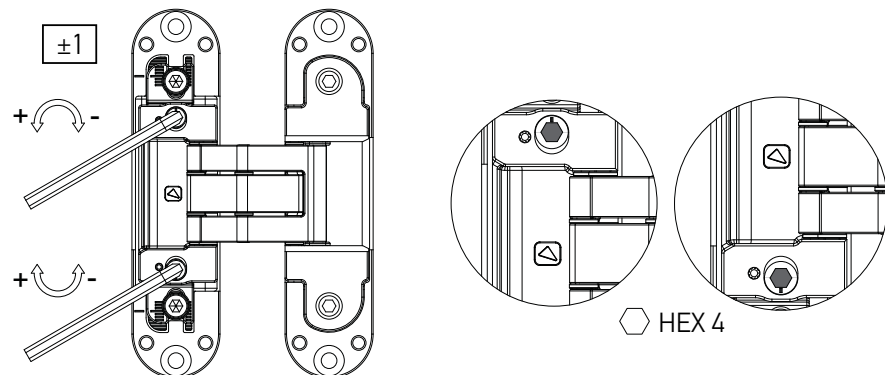

Within ±1 mm.

Depth adjustment is carried out on the part of the hinge installed in the door frame. To make the adjustment, it is necessary to rotate the two specified eccentric pins, using a 4 mm hex key. It is required only $\pm 90^\circ$ rotation of pin from the zero position, it is not permitted rotation 360° !


COVER OF CONCEALED HINGE FOR INTERIOR DOOR 24 MM

Part No.	Color
D9004-00-N01	White
D9004-00-N02	Brown
D9004-00-N03	Chrome matte
D9004-00-N05	Gold
D9004-00-N06	Bronze
D9004-00-N07	Black
D9004-00-N09	Anthracite gray

COVER OF CONCEALED HINGE FOR INTERIOR DOOR 30 MM

Part No.	Color
D9006-00-N01	White
D9006-00-N02	Brown
D9006-00-N03	Chrome matte
D9006-00-N05	Gold
D9006-00-N06	Bronze
D9006-00-N07	Black
D9006-00-N09	Anthracite gray

Hinges were tested in independent certified laboratories and received documents certifying their quality. The quality of AXOR Arte Interior concealed door hinges is confirmed by the quality certificate of the International Institute of Window and Door Technologies ITB. You can download certificates on the website axorindustry.com.

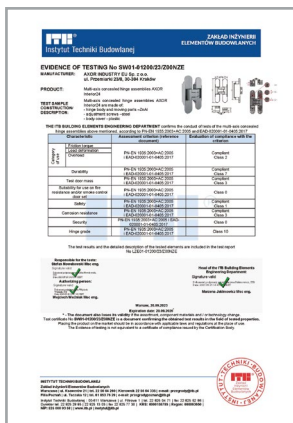

AXOR



AXOR INDUSTRY LLC

49041, Dnipro,
Pratsi Ave., 32
axorindustry.com

rev 1.02.00
09.09.2026



[instagram.com/axor_live](https://www.instagram.com/axor_live)



facebook.com/AxorIndustry



infoaxor@axorindustry.com



+38 067 55 42 777 Viber
(for messages only)